



▲ **TS-200** 205x 158x 59 mm

▲ **TS-400** 205x 158x 67 mm

▲ **TS-700** 295x 184x 70 mm

Features

- True sine wave output (THD<3%)
- **2 times high surge power for motor related application**
- Advanced digital control by microprocessor
- Output voltage / frequency adjustable
- High efficiency up to 91%
- Standby saving mode to conserve energy (TS-700)
- Built-in fan ON/OFF control function (TS-400/700)
- Fanless design, cooling by free air convection (TS-200)
- Front panel indicator for load / battery / operation status
- High frequency design
- Input protections:
Bat. low alarm / Bat. low shutdown / reverse polarity / over voltage
- Output protections:
Short circuit / Overload / Over temperature
- Applications:
Home appliance, power tools, office and portable equipment, vehicle and yacht...etc.
- 2 years warranty

General Specification (Please refer to www.meanwell.com for detail spec.)



Model No.	TS-200	TS-400	TS-700
Rated output power(typ.)	200W	400W	700W
Maximum output power	230W for 3 minutes; 300W for 10 sec.	460W for 3 minutes; 600W for 10 sec.	800W for 3 minutes; 1050W for 10 sec.
Output surge rating (30 cycles.)	400W	800W	1400W
DC input rated voltage	12VDC, 24VDC or 48VDC		
AC output voltage	100 / 110 / 115 / 120VAC; 200 / 220 / 230 / 240VAC selectable by setting button		
Output frequency	50Hz / 60Hz selectable by setting button		
AC output waveform	True sine wave, THD<3.0%		
AC output regulation	±3% of rated output voltage		
No load dissipation	-----		< 6W @ standby saving mode
Working temperature	-10 ~ +40°C @ 100% load, 60°C @ 50% load		0 ~ +40°C @ 100% load, 60°C @ 50% load
Safety standards	110V	design refer to UL458	
	230V	Compliance to EN60950-1	
EMC standards	110V	Compliance to FCC class A	
	230V	Compliance to EN55022 class A, E-Mark, EN61000-4-2,3,8, ENV50204	

200W

Model No.	Continue power	Input VDC	Output VAC / Hz	Output socket	Effi.
TS-200-112[A]	200W	10.5-15	110 / 60	TYPE-A	84%
TS-200-124[A]	200W	21.0-30	110 / 60	TYPE-A	86%
TS-200-148[A]	200W	42.0-60	110 / 60	TYPE-A	88%
TS-200-212[B]	200W	10.5-15	230 / 50	TYPE-B	85%
TS-200-224[B]	200W	21.0-30	230 / 50	TYPE-B	87%
TS-200-248[B]	200W	42.0-60	230 / 50	TYPE-B	90%

□ = A, B (standard models), C, D, E or F (optional models)

700W

Model No.	Continue power	Input VDC	Output VAC / Hz	Output socket	Effi.
TS-700-112[A]	700W	10.5-15	110 / 60	TYPE-A	86%
TS-700-124[A]	700W	21.0-30	110 / 60	TYPE-A	88%
TS-700-148[A]	700W	42.0-60	110 / 60	TYPE-A	89%
TS-700-212[B]	700W	10.5-15	230 / 50	TYPE-B	89%
TS-700-224[B]	700W	21.0-30	230 / 50	TYPE-B	90%
TS-700-248[B]	700W	42.0-60	230 / 50	TYPE-B	91%


□ = A, B (standard models), C, D, E or F (optional models)

400W

Model No.	Continue power	Input VDC	Output VAC / Hz	Output socket	Effi.
TS-400-112[A]	400W	10.5-15	110 / 60	TYPE-A	84%
TS-400-124[A]	400W	21.0-30	110 / 60	TYPE-A	86%
TS-400-148[A]	400W	42.0-60	110 / 60	TYPE-A	88%
TS-400-212[B]	400W	10.5-15	230 / 50	TYPE-B	85%
TS-400-224[B]	400W	21.0-30	230 / 50	TYPE-B	87%
TS-400-248[B]	400W	42.0-60	230 / 50	TYPE-B	90%

□ = A, B (standard models), C, D, E or F (optional models)

AC Output Receptacles (option)

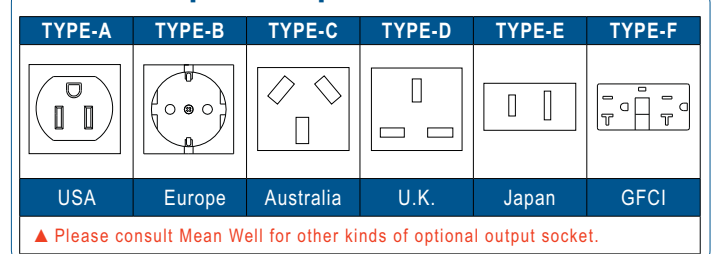



▲ **TS-1000** 345x 184x 70 mm

▲ **TS-1500** 420x 220x 88 mm

▲ **TS-3000** 474x 283x 98 mm

Features

- True sine wave output (THD<3%)
- 2 times high surge power for motor related application
- Advanced digital control by microprocessor
- High efficiency up to 93%
- Standby saving mode to conserve energy
- Built-in fan ON/OFF control function
- Output voltage / frequency adjustable
- Front panel indicator for load / battery / operation status
- High frequency design
- Input protections:
 - Bat. low alarm / Bat. low shutdown / reverse polarity / over voltage
- Output protections:
 - Short circuit / Overload / Over temperature
- Applications:
 - Home appliance, power tools, office and portable equipment, vehicle and yacht...etc.
- 2 years warranty

General Specification (Please refer to www.meanwell.com for detail spec.)

UL us E13 FCC CE (3000W pending)

Model No.	TS-1000	TS-1500	TS-3000 Under Development
Rated output power(typ.)	1000W	1500W	3000W
Maximum output power	1150W for 3 minutes; 1500W for 10 sec.	1725W for 3 minutes ; 2250W for 10 sec.	3450W for 3 minutes ; 4500W for 10 sec.
Output surge rating (30 cycles.)	2000W	3000W	6000W
DC input rated voltage	12VDC, 24VDC or 48VDC		
AC output voltage	100 / 110 / 115 / 120VAC or 200 / 220 / 230 / 240VAC selectable by setting button		
AC waveform	True sine wave, THD<3.0%		
AC regulation	±3% of rated output voltage		
No load dissipation	< 6W @ standby saving mode	≤18W @ standby saving mode	≤7W @ standby saving mode
Working temperature	0 ~ +40°C @ 100% load, 60°C @ 50% load		
Safety standards	110V	Compliance to UL458 (except for 48V and only for GFCI receptacle)	
	230V	Compliance to EN60950-1	
EMC standards	110V	Compliance to FCC class A	
	230V	Compliance to EN55022 class A, E-Mark, EN61000-4-2,3,8, ENV50204	

1000W

Model No.	Continue power	Input VDC	Output VAC / Hz	Output socket	Effi.
TS-1000-112 A	1000W	10.5-15	110 / 60	TYPE-A	88%
TS-1000-124 A	1000W	21.0-30	110 / 60	TYPE-A	89%
TS-1000-148 A	1000W	42.0-60	110 / 60	TYPE-A	90%
TS-1000-212 B	1000W	10.5-15	230 / 50	TYPE-B	90%
TS-1000-224 B	1000W	21.0-30	230 / 50	TYPE-B	91%
TS-1000-248 B	1000W	42.0-60	230 / 50	TYPE-B	92%

□ = A, B (standard models), C, D, E or F (optional models)

3000W

Under development

Model No.	Continue power	Input VDC	Output VAC / Hz	Output socket	Effi.
TS-3000-112 A	2700W	10.5-15	110 / 60	TYPE-A	87%
TS-3000-124 A	3000W	21.0-30	110 / 60	TYPE-A	89%
TS-3000-148 A	3000W	42.0-60	110 / 60	TYPE-A	90%
TS-3000-212 B	3000W	10.5-15	230 / 50	TYPE-B	88%
TS-3000-224 B	3000W	21.0-30	230 / 50	TYPE-B	90%
TS-3000-248 B	3000W	42.0-60	230 / 50	TYPE-B	93%

□ = A, B (standard models), C, D, E or F (optional models)

1500W

Model No.	Continue power	Input VDC	Output VAC / Hz	Output socket	Effi.
TS-1500-112 A	1500W	10.5-15	110 / 60	TYPE-A	87%
TS-1500-124 A	1500W	21.0-30	110 / 60	TYPE-A	89%
TS-1500-148 A	1500W	42.0-60	110 / 60	TYPE-A	90%
TS-1500-212 B	1500W	10.5-15	230 / 50	TYPE-B	88%
TS-1500-224 B	1500W	21.0-30	230 / 50	TYPE-B	90%
TS-1500-248 B	1500W	42.0-60	230 / 50	TYPE-B	91%

□ = A, B (standard models), C, D, E or F (optional models)

AC Output Receptacles (option)

TYPE-A	TYPE-B	TYPE-C	TYPE-D	TYPE-E	TYPE-F
USA	Europe	Australia	U.K.	Japan	GFCI

▲ Please consult Mean Well for other kinds of optional output socket.

DC/AC Inverter

1500~3000W True Sine Wave Solar Inverter



Features

- True sine wave output (THD<3%)
- 2 times high surge power for motor related application
- Advanced digital control by microprocessor
- High efficiency up to 93%
- Standby saving mode to conserve energy
- Built-in fan ON/OFF control function
- Output voltage / frequency adjustable
- Front panel indicator for load / battery / operation status
- High frequency design
- Selectable UPS and energy saving mode
- AC by pass, built-in AC and solar charger
- Fast transfer time under 10ms
- Solar input current up to 30A max.
- Input protections:
Bat. low alarm / Bat. low shutdown / reverse polarity / over voltage
- Output protections:
Short circuit / Overload / Over temperature / AC circuit breaker
- Optional monitoring software
- Applications:
Home appliance, power tools, office and portable equipment, vehicle and yacht...etc.
- 2 years warranty

General Specification (Please refer to www.meanwell.com for detail spec.)



Model No.	TN-1500	TN-3000 Under Development
Rated output power(typ.)	1500W	3000W
Maximum output power	1725W for 3 minutes ; 2250W for 10 seconds	3450W for 3 minutes ; 4500W for 10 seconds
Output surge rating (30 cycles.)	3000W	6000W
DC input rated voltage	12VDC, 24VDC or 48VDC	
AC output voltage	100 / 110 / 115 / 120VAC or 200 / 220 / 230 / 240VAC selectable by setting button	
AC waveform	True sine wave, THD<3.0%	
AC regulation	±3% of rated output voltage	
No load dissipation	≤18W @ standby saving mode	≤7W @ standby saving mode
Transfer time	≤10ms inverter mode ←→ by pass mode	
Working temperature	0 ~ +40°C @ 100% load, 60°C @ 50% load	
Safety standards	110V	Compliance to UL458 (except for 48V and only for GFCI receptacle)
	230V	Compliance to EN60950-1
EMC standards	110V	Compliance to FCC class A
	230V	Compliance to EN55022 class B, E-Mark, EN61000-4-2,3,4,5,6,8,11, ENV50204

1500W (Inverter with AC & Solar Charger)

Model No.	Continue power	Input VDC	Output VAC / Hz	Output socket	Effi.
TN-1500-112[A]	1500W	10.5-15	110 / 60	TYPE-A	87%
TN-1500-124[A]	1500W	21.0-30	110 / 60	TYPE-A	89%
TN-1500-148[A]	1500W	42.0-60	110 / 60	TYPE-A	90%
TN-1500-212[B]	1500W	10.5-15	230 / 50	TYPE-B	88%
TN-1500-224[B]	1500W	21.0-30	230 / 50	TYPE-B	90%
TN-1500-248[B]	1500W	42.0-60	230 / 50	TYPE-B	91%

□ = A, B (standard models), C, D, E or F (optional models)

3000W (Inverter with AC & Solar Charger) Under Development

Model No.	Continue power	Input VDC	Output VAC / Hz	Output socket	Effi.
TN-3000-112[A]	2700W	10.5-15	110 / 60	TYPE-A	87%
TN-3000-124[A]	3000W	21.0-30	110 / 60	TYPE-A	89%
TN-3000-148[A]	3000W	42.0-60	110 / 60	TYPE-A	90%
TN-3000-212[B]	2700W	10.5-15	230 / 50	TYPE-B	88%
TN-3000-224[B]	3000W	21.0-30	230 / 50	TYPE-B	90%
TN-3000-248[B]	3000W	42.0-60	230 / 50	TYPE-B	93%

□ = A, B (standard models), C, D, E or F (optional models)



We are a TQM (Total Quality Management) company and ISO-9001 certified since 1994.



Products —

- One Stop Shopping
- Total Solution